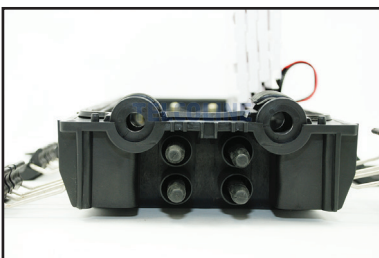
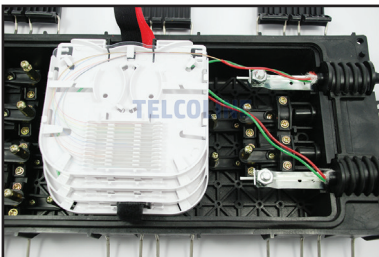


Horizontal fiber optic splice closures

Horizontal fiber optic splice closure 96F, GFP-14C

**Features****Horizontal fiber optic splice closure 96F, GFP-14C**

Number of ports	12 round ports (12 x Ø19 mm) 2 round ports (2 x Ø24 mm)
Material	Polypropylene PP
Colour	Black
Dimensions	460x200x120 mm
Weight:	2 kg
Protection	IP68
Number of splice trays	4
Capacity of tray	24 splice sleeves
Operating temperature	-35°C~+65°C

Equipment

Fiber optic splice sleeve (x96)

4 splice trays (capacity of tray: 24 splice sleeves)

Metal hose clamps (x4)

Diameter reducers: 8x12 mm, 8x14.5 mm

Brackets for input cable (x4)

Insulation tape

Cable ties

Application

Ground installation

Duct systems

- Splice sleeves protection of fiber optic cables against mechanical dangers and changeable weather conditions
- Resistance to substances occurring in duct systems
- Low and high temperature resistant
- UV, water resistant

- Sealing of all inlet/outlet slots
- Central duple slots
- Wall/flat surface fixing or directly in the ground

