


Fiber optic splice closures

Fiber optic splice closure I-M.144.6.1, 144F, 6:1

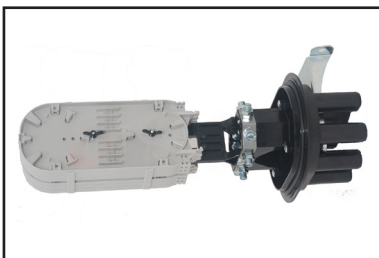

Features	Fiber optic splice closure I-M.144.6.1
Number of ports	6 round ports (Ø22 mm) 1 oval port (dimensions: 43x25 mm)
Material	Polypropylene PP
Colour	Black
Height	450 mm
Cover diameter	190 mm
Weight	3.8 kg
Protection	IP68
Number of splice trays	6
Tray capacity	24
Operating temperature	-35°C~+65°C

Equipment

Splice trays: 6

Fiber optic splice sleeves: 144

Heat shrink sleeves: 7

The ground wire

Insulation tape

Sandpaper

Fiber protective tube

Application

Aerial systems

Duct systems/ground installations

- Splice sleeves protection of fiber optic cables against mechanical dangers and changeable weather conditions
- Resistance to substances occurring in duct systems
- Low and high temperature resistant
- UV, water resistant

falesiasystemy

