


Fiber optic splice closures

Fiber optic splice closure I-M.144.7.1, 144F

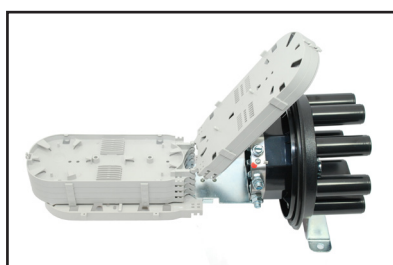

Features

Fiber optic splice closure I-M.144.7.1

Number of ports	7 round ports (Ø25 mm) 1 oval port (dimensions: 82x46 mm)
Material	Polypropylene PP
Colour	Black
Height	500 mm
Cover diameter	180 mm
Weight	4 kg
Protection	IP68
Number of splice trays	6
Max. fiber optic splice sleeves	144
Operating temperature	-35°C~+65°C

Equipment

Wall fixing bracket
Clamp for pole fixing
Metal clamps (x4)
Fiber optic splice sleeve (x144)
Heat shrink sleeves (x6)
Insulation tape
Fiber clip

Application

Aerial systems
Ground installations
Duct systems

- Splice sleeves protection of fiber optic cables against mechanical dangers and changeable weather conditions
- Resistance to substances occurring in duct systems
- Low and high temperature resistant
- UV, water resistant

- Heat shrink sleeves for all ports
- Wall or pole fixing

