


Fiber optic splice closure I-M.288.7.1-003

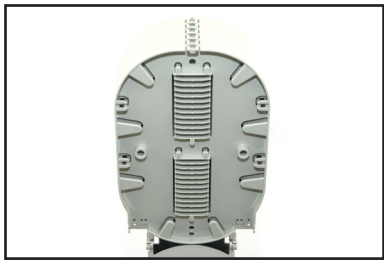

Features	Fiber optic splice closure I-M.288.7.1-003
Number of ports	7 round ports (7 x Ø25 mm) 1 oval port (dimensions: 83x45 mm)
Material	Polypropylene PP
Colour	Black
Height	500 mm
Cover diameter	180 mm
Weight	2.5 kg
Protection	IP68
Number of splice trays	6
Max. fiber optic splice sleeves	288(48x6)
Operating temperature	-40°C~+65°C
Equipment	
Wall fixing bracket	
Fiber optic splice sleeve (x288)	
Heat shrink sleeves (x8)	
Pole fixing clamp	
Insulation tape	
Sandpaper	
Fiber clip	
Ground cable	
Markers	
Cable ties	
Application	
Aerial systems	
Duct, ground installations	
Wall or pole fixing	

- Splice sleeves protection of fiber optic cables against mechanical dangers and changeable weather conditions
- Resistance to substances occurring in duct systems
- Low and high temperature resistant
- UV, water resistant