


Fiber optic splice closure T-M.048.3.1

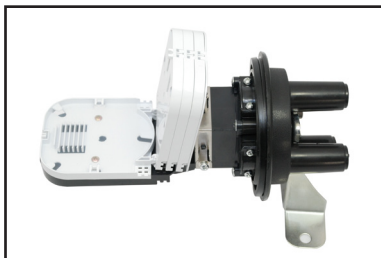

Features	Fiber optic splice closure T-M.048.3.1
Number of ports	3 round ports (3x $\varnothing 22\text{mm}$) 1 oval port (dimensions: 43x22 mm)
Material	Polypropylene PP
Colour	Black
Height	300 mm
Cover diameter	120 mm
Weight	2.1 kg
Protection	IP68
Number of splice trays	4
Max. fiber optic splice sleeves	48
Operating temperature	-35°C~+65°C

Equipment
Fiber optic splice sleeve (x48)
Heat shrink sleeves (x4)
Fiber optic trays (x4)
Clamp and bracket for pole mounting
Vent, markers, insulating tape

Application
Aerial systems
Duct, ground installations
Wall or pole mounting

- Splice sleeves protection of fiber optic cables against mechanical dangers and changeable weather conditions
- Resistance to substances occurring in duct systems
- Low and high temperature resistant
- UV, water resistant



falesiasystemy

