


# Fiber optic splice closures

## Fiber optic splice closure T-T004, 72F

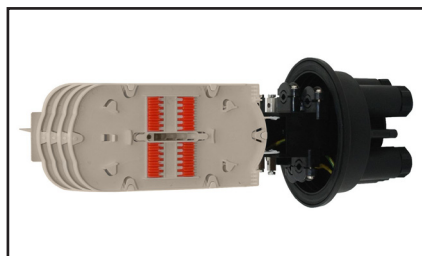

Features	Fiber optic splice closure T-T004
Number of ports	5 round ports (4x $\varnothing$ 26 mm/1x $\varnothing$ 48 mm)
Material	Polypropylene PP
Colour	Black
Weight:	3 kg
Protection	IP67
Number of splice trays	4
Max. fiber optic splice sleeves	96
Number of slots for SC simplex/LC duplex adapters	36
Operating temperature	-35°C~+65°C

### Equipment

Splice trays: 4 (capacity of 1 tray - 24 splice sleeves)

Fiber optic splice sleeves: 72

Ground cable

Patchpanel: 36 slots

Set of mixers:

- 2 mixers for inlet 48 mm. First - 16x $\varnothing$ 7 mm/second 2x $\varnothing$ 18 mm
- 4 mixers for inlet 26 mm. 1x $\varnothing$ 7 mm/8x(3x2 mm) - for flat cables
- 4 mixers for inlet 26 mm. 4x $\varnothing$ 7 mm
- 4 mixers for inlet 26 mm. 1x $\varnothing$ 15 mm
- 4 mixers for inlet 26 mm. 1x $\varnothing$ 7 mm/8x $\varnothing$ 3 mm
- 4 mixers for inlet 26 mm. 6x(5x2 mm) - for flat cables

### Application

Aerial systems

Ground installations

Duct systems

- Splice sleeves protection of fiber optic cables against mechanical dangers and changeable weather conditions
- Resistance to substances occurring in duct systems
- Low and high temperature resistant
- UV, water resistant

